

FR Series Refrigerated Compressed Air Dryers



FR020A
2.4 m³/min
(84.8 cfm)

FR010A
1.2 m³/min
(42.4 cfm)

FR005A
0.6 m³/min
(21.2 cfm)


FR050A
7.0 m³/min
(247 cfm)

FR030A
4.4 m³/min
(155 cfm)




Air-cooled refrigerant dryers

- Performance rated for the Australian climate
- Manufactured to ISO 9001 quality standards
- High efficiency stainless steel heat exchanger
- Unobstructed low pressure loss air flow path
- Auto condensate drain with isolation valve
- Fan-forced air cooled refrigerant condenser
- Standard 240 Volt electrical plug connection
- Corrosion resistant chassis and enclosure

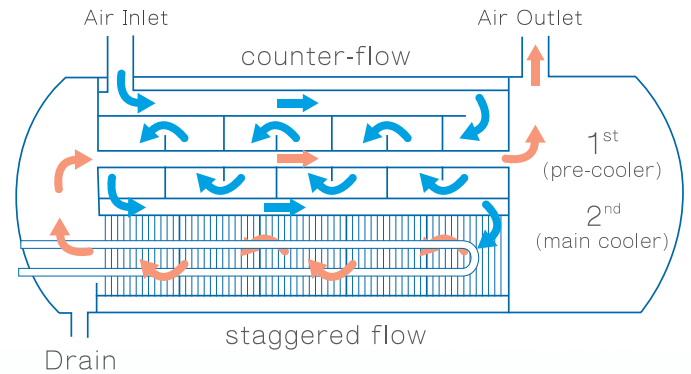

System Flow Chart

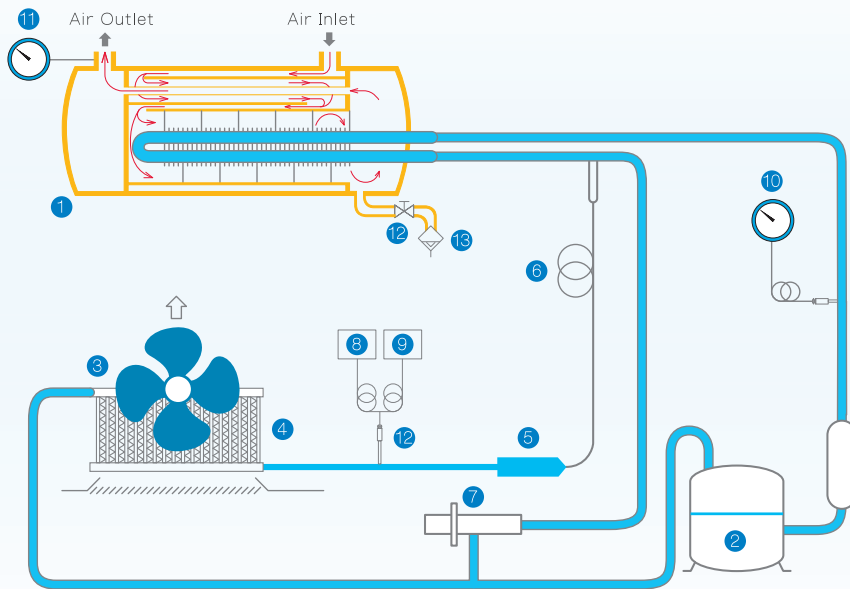

- 1 HEAT EXCHANGER
- 2 COMPRESSOR
- 3 FAN MOTOR
- 4 AIR-COOLED CONDENSER
- 5 LINE FILTER
- 6 CAPILLARY TUBE
- 7 MODULATION VALVE
- 8 HIGH PRESSURE PROTECTION SWITCH
- 9 PRESSURE SWITCH (fan)
- 10 PRESSURE GAUGE (evaporating pressure)
- 11 PRESSURE GAUGE (air outlet)
- 12 BALL VALVE
- 13 CONDENSATE DRAIN VALVE

SPECIFICATIONS		FR005A	FR010A	FR020A	FR030A	FR050A
Air Flow Capacity	m ³ /min (cfm)	0.6 (21.2)	1.2 (42.4)	2.4 (84.8)	4.4 (155)	7.0 (247)
Compressor Size Guide	kW (hp)	4 (5.5)	7.5 (10)	15 (20)	22 (30)	37 (50)
Inlet Air Temperature	°C	35 Nominal / 50 Maximum				
Ambient Temperature	°C	32 Nominal / 40 Maximum				
Dew Point	°C	2~10 @ 700 kPa (102 psi)				
Air Pressure	kPa (psi)	700 (102) Nominal / 1,000 (145) Maximum				
Refrigerant		R134a			R407C	
Power Consumption	kW	0.33	0.55	0.8	0.8	1.6
Electrical Power Supply		240 Volt / 1-Phase / 50 Hz / 10 Amp				
Pipe Connections	BSP	1/2"	1/2"	1"	1"	1-1/2"
Height	mm	478	542	705	705	966
Width	mm	377	722	797	797	944
Depth	mm	490	423	423	440	490
Weight	kg	22	34	42	42	70

Exclusive Australian Distributor:
GLENCO MANUFACTURING PTY LTD
 72 Platinum Street
 Crestmead QLD 4132 Australia
 Phone: (07) 3803 4100
 Fax: (07) 3803 1255
 email: sales@glencomfg.com.au
 web: www.glencomfg.com.au

Your local authorized Fusheng dealer:

